
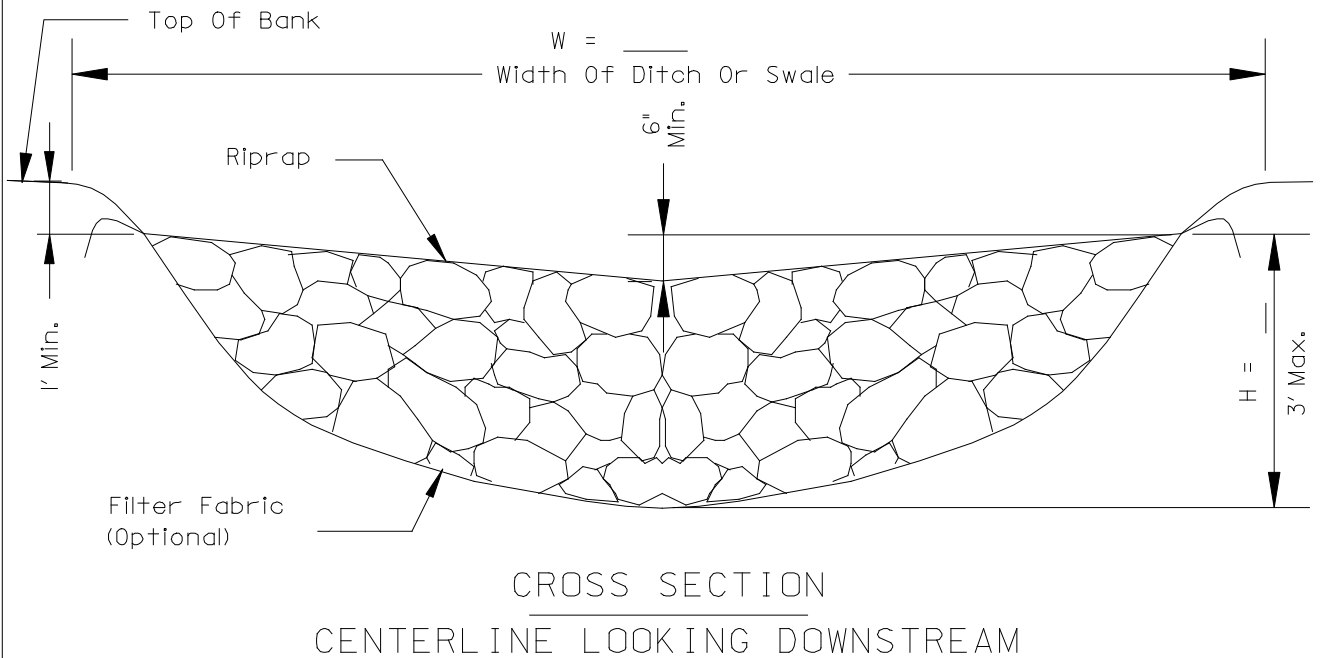


ROCK DITCH CHECK - RIPRAP

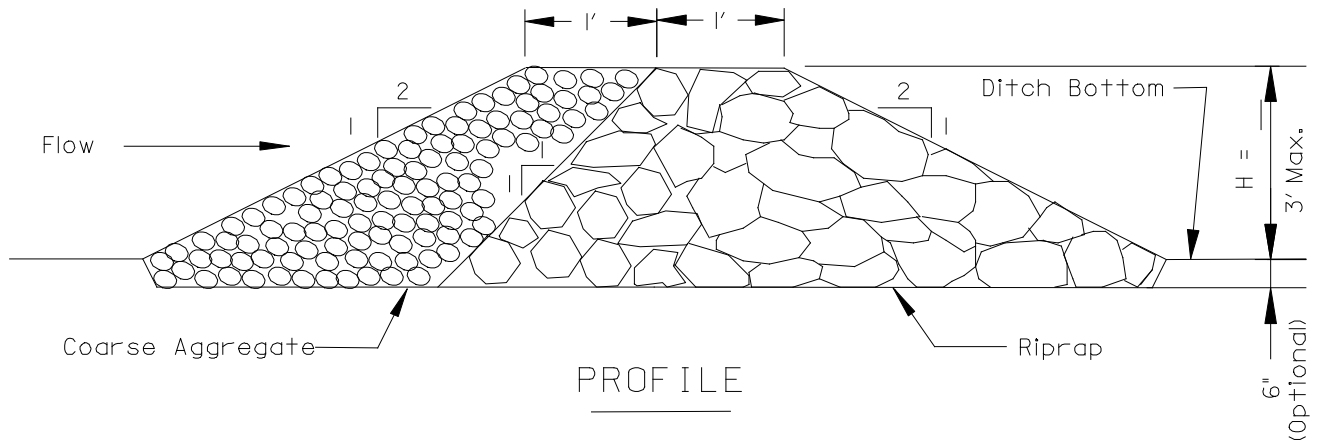

NOTES;

1. Filter fabric shall meet the requirements of material specification 592 GEOTEXTILE, Table 1 or 2, Class I, II, or IV and shall be placed over the cleared area prior to the placing of rock.
2. Coarse aggregate shall meet one of the following IDOT gradations, CA-1, CA-2, CA-3, or CA-4.
3. Riprap shall meet IDOT gradation RR-3 or RR-4 and meet Quality Designation A.
4. Coarse aggregate and riprap shall be placed according to construction specification 25 ROCKFILL using placement Method 1 and Class III compaction.
5. For added stability, the base of the dam may be keyed 6 inches into the soil.
6. See plans for spacing of dams and H dimensions.
7. Maximum drainage area to each dam is 10 acres.
8. ROCK CHECK DAM-COARSE AGGREGATE IL-605CA may be used for drainage areas under 2 acres.

1 OF 1

SHEET

DESIGN BY : DOUG GROVESTEEN

REVISED : 5/23/2003

APPROVED BY :
DATE :

SCALE NONE



CITY OF BLOOMINGTON
ENGINEERING DEPARTMENT

STANDARD DETAIL: I3.07-1